



Flat Quadband Combination Antenna



The FLMFA quadband antenna combines GPS, cellular/PCS, and 2.4GHz into a sleek package suitable for your covert vehicle/asset tracking requirements.

A 27dB GPS amplifier with wide operating voltage range of 3V to 5V, allows the FLMFA to function with a variety of GPS receivers.

Three separate RG174 cables used for GPS, cellular/PCS, and 2.4GHz. RG316 cables are available as well as a wide variety of connectors, including Hirose and FAKRA connectors.

Cable lengths and connector configurations customized to meet your requirements.

Compare its performance against other similar antennas and you will see that the FLMFA is your choice.

Features





- ✓ 27dB GPS Antenna
- ✓ Operates at 824-960MHz, 1850-1990MHz, and 2.4-2.4835GHz
- ✓ Compact size 5.6" x 2.1" x 0.6" (LWH)
- ✓ 3V-5V GPS operating voltage range

GPS Antenna:	
Frequency	1575.42 ± 3 MHz
VSWR	1.5 max.
Bandwidth	20 MHz min. at -10 dB
Axial Ratio	3dB typical
Impedance	50Ω
Peak Gain	4 dBic min. (7cm x 7cm ground plane)
Gain Coverage	≥ -4dBic at -90° ≤ θ ≤ 90° (over 75% volume)
Power Handling	1 Watt
Polarization	RHCP
Amplifier Gain	27 dB typical
Noise Figure	1.5 dB typical
Output VSWR	2.0 max.
DC Voltage	3.0 V to 5.5V
DC Current	22±3 mA
Cellular/PCS and 2.4GHz Antenna	
Frequency	824-960MHz, 1850-1990MHz, 2.4-2.4835GHz
Peak Gain	4dBi: 824-960MHz 3dBi: 1850-1990MHz, 3dBi: 2.4-2.4835GHz
VSWR	2.0 : 1
Impedance	50Ω
Pattern Type	Omni-directional
Power Handling	25 Watts max.
Mechanical:	
Weight (Without Cable)	2.11 oz. (0.06 kg) max.
Size (LWH)	5.6" x 2.1" x 0.6" (143mm x 54.4mm x 16mm)
Cable Type & Length (Standard)	GPS: 9.8' (3m) RG174 800/900/1900: 9.8' (3m) RG174 2.4GHz: 9.8' (3m) RG174
Connector (Standard, Others available)	GPS: SMA plug 800/900/1900: SMA plug 2.4GHz: SMA plug
Mounting	Velco or double-sided tape
Environmental:	
Working Temperature	-40°F < T < +185°F (-40°C < T < +85°C)
Storage Temperature	-50°F < T < +203°F (-50°C < T < +95°C)
Vibration	Sine Sweep, 1G(0-P), 10-150-10Hz each axis
Weatherproof	Waterproof

Note: Specifications subject to change without notice.



MECHANICAL DRAWING

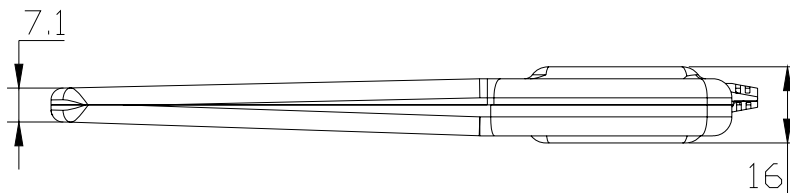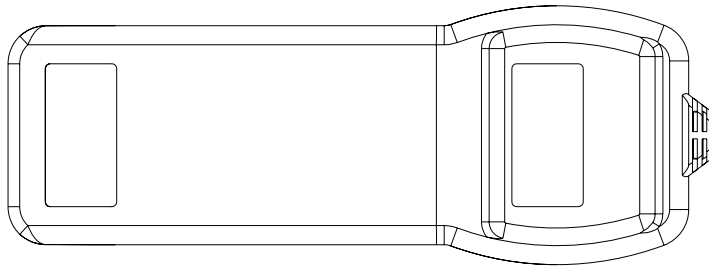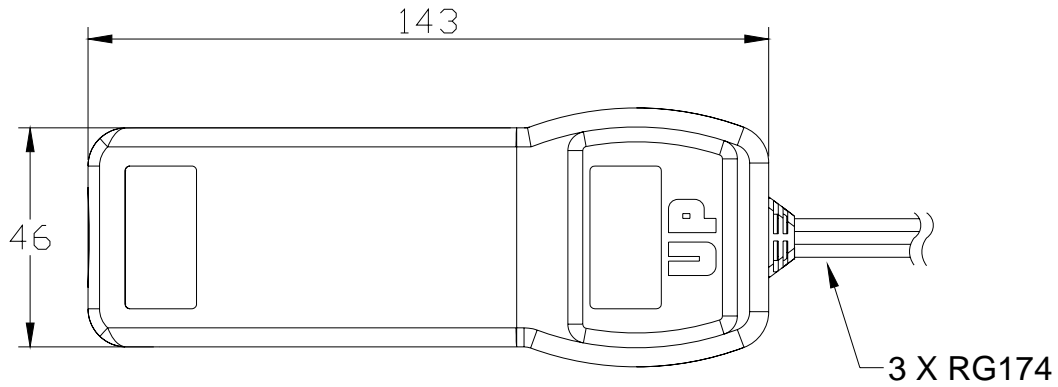

FLMFA
Material:ABS
Color:Black
Unit:mm

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES:	
ANGLE	$\pm 1^\circ$
1PLACE DECIMALS	± 0.2
2PLACE DECIMALS	± 0.15
3PLACE DECIMALS	± 0.05